
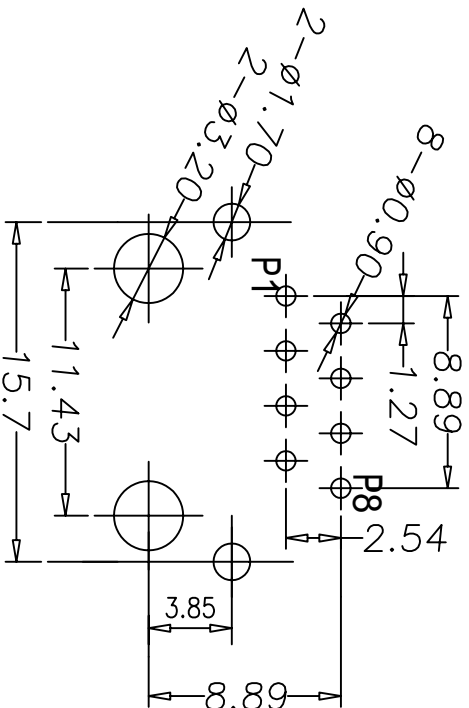
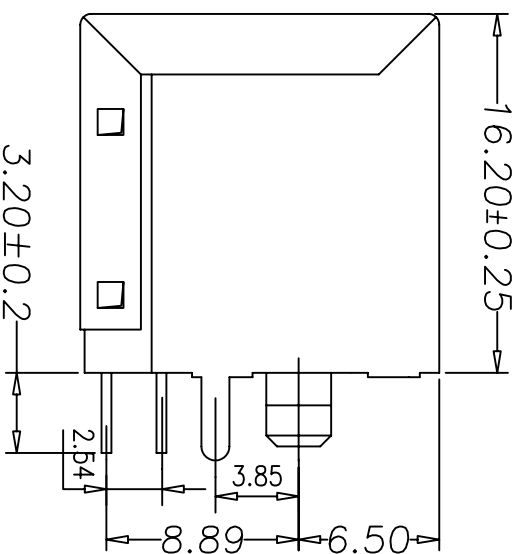


# XW-ETLINK®

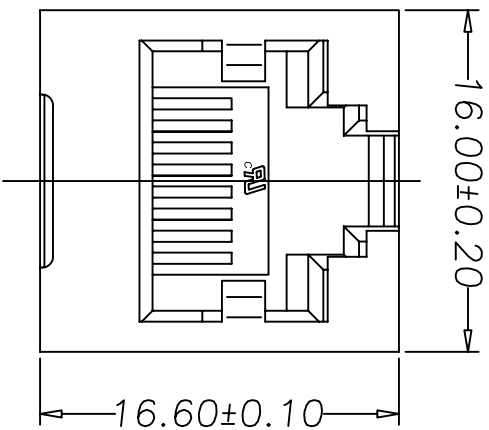

**NOTES:**  
**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMSMAX
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 NDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, 1MIN.

**MECHANICAL:**

1. HOUSING & INSERT MATERIAL : PBT UL94V-0.
  2. CONTACT MATERIAL : DIAMETER0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
  3. SHIELD : 0.20~0.25MM THICKNESS BRASS WITH NI PLATED.
  4. MATING/UNMATING FORCE : 2.2KG.F MAX.
  5. RETENTION STRENGTH : 7.7KG.F MIN BETWEEN JACK AND PLUG.
  6. OPERATING LIFE : 750 CYCLES MIN.
- ENVIRONMENTAL:**
- 1. STORAGE : -40°C ~+85°C REATIVE HUMIDITY<70%
  - 2. OPERATION : -40°C ~+85°C

XW-216-11-2 1U"/3U"/6U"/15U"/30U"/50U"



东莞市迅旺电子科技有限公司  
DongGuan XunWang Electronic Technology Co., Ltd.

Scale: None

Units: mm

Draw : Kal

Approved: PETER

Unless otherwise stated  
otherwise tolerances as follows


.XXX ±0.10 .XX ±0.25 .X± 0.35  
ANG ±3°

name: 5224S8P8C-1X1-B3.85

Part number: XW-216-11-2

Rev: A

Date: 2010/05/08



Page: 1/1

File Name:

E:/XUNWANG/工程图

Tel: 0769-85398667 Fax: 0769-85384545 Http://www.dgxunwang.com